

ZXM6-H120 Series

Znshinesolar 5BB **HALF-CELL**
Monocrystalline PV Module



120

Mono Poly Solutions

315W | 320W | 325W | 330W | 335W | 340W



Made with selected materials and components to grant quality, duration, efficiency and through outputs, the ZXM6-H120 monocrystalline modules by ZNSHINE SOLAR (power output 315 up to 340Wp), represent a highly flexible solution for diverse installation types, from industrial rooftop plants to small home PV systems or large ground surfaces. This allows you to produce clean energy while reducing your energy bill.

ZNSHINE SOLAR' S ZXM6-H120 monocrystalline solar modules are tested and approved by international acknowledged laboratories, so that we can offer our customers a reliable and price-quality optimized product. The linear warranty on product outputs further ensures increased security and return on investments over time.

10 years product warranty for general application

15 years product warranty for Rooftop PV system

25 years output warranty / 0.55% linear degradation p.a.

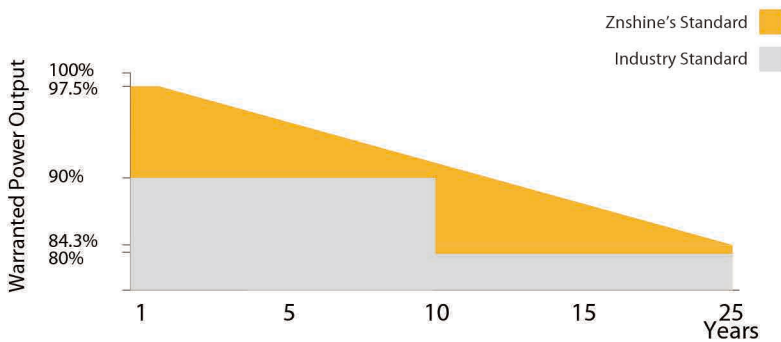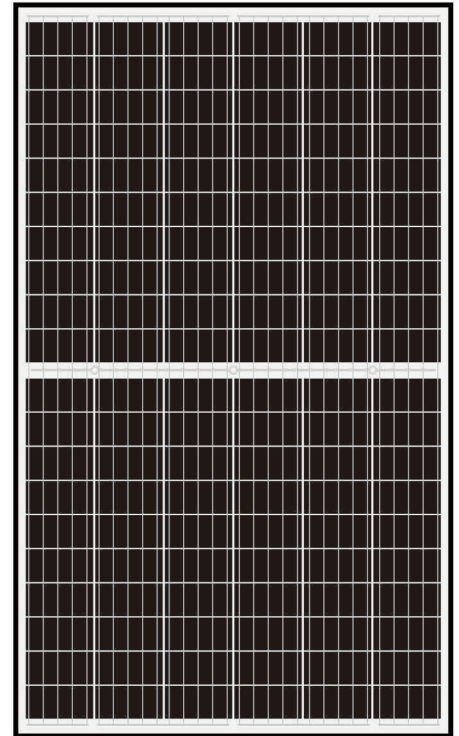

Tier 1 & Bankable

BNEF Tier 1 Manufacturer and Global Bankable modules



Enhanced Warranty

15 years product warranty for rooftop mounted PV system



Easy to install

The module is very light in weight so the installation is easier and transport costs are lower



Better Weak Illumination Response

Lower temperature coefficient and wide spectral response, higher power output, even under low-light settings



Certified to withstand the most challenging environmental conditions

3600 Pa snow load (with safety factor 1.5)
2400 Pa wind load (with safety factor 1.5)



Anti PID

Minimum power degradation caused by PID effect is guaranteed



ZNShine PV-Tech Co., LTD, founded in 1988, is a world-leading high-performance PV module manufacturer, PV power station developer, EPC and power station operator. With its state-of-the-art production lines, the company boasts module output of 5GW. Bloomberg has listed ZNShine as a global Tier 1 PV manufacturer and Top 4 reliable PV supplier.

www.znshinesolar.com

ELECTRICAL PROPERTIES | STC*

Module Type	ZXM6-H120-315/M	ZXM6-H120-320/M	ZXM6-H120-325/M	ZXM6-H120-330/M	ZXM6-H120-335/M	ZXM6-H120-340/M
Nominal Power Watt Pmax(W)	315	320	325	330	335	340
Power Output Tolerance Pmax(%)	0~+3	0~+3	0~+3	0~+3	0~+3	0~+3
Maximum Power Voltage Vmp(V)	33.2	33.4	33.6	33.8	34.0	34.2
Maximum Power Current Imp(A)	9.49	9.59	9.68	9.77	9.86	9.95
Open Circuit Voltage Voc(V)	40.0	40.2	40.4	40.6	40.8	41.0
Short Circuit Current Isc(A)	10.00	10.10	10.20	10.30	10.40	10.50
Module Efficiency (%)	18.54	18.83	19.12	19.42	19.71	20.01

*STC (Standard Test Condition): Irradiance 1000W/m², Module Temperature 25°C, AM 1.5
*The data above is for reference only and the actual data is in accordance with the practical testing

ELECTRICAL PROPERTIES | NOCT*

Maximum Power Pmax(Wp)	233.5	237.3	240.8	244.5	248.2	251.9
Maximum Power Voltage Vmpp(V)	30.7	30.9	31.1	31.2	31.4	31.6
Maximum Power Current Impp(A)	7.61	7.68	7.75	7.83	7.90	7.98
Open Circuit Voltage Voc(V)	37.1	37.3	37.5	37.7	37.8	38.0
Short Circuit Current Isc(A)	8.08	8.16	8.24	8.32	8.40	8.48

*NOCT: Irradiance 800W/m², Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s
*The data above is for reference only and the actual data is in accordance with the practical testing

TEMPERATURE RATINGS

NOCT	45°C ±2°C
Temperature coefficient of Pmax	-0.37%/°C
Temperature coefficient of Voc	-0.29%/°C
Temperature coefficient of Isc	0.05%/°C

MECHANICAL DATA

Solar cells	Mono 158.75×79.375 mm
Cells orientation	120 (6×20)
Module dimension	1696×1002×35 mm
Weight	20.5 kg
Glass	High transparency, low iron, tempered Glass 3.2 mm (AR-coating)
Junction box	IP 68, 3 diodes
Cables	H1Z2Z2-K 1×4,0mm ²
Connectors	LJQ-1 Taizhou Jinxiu Electrical Science & Technology Co Ltd


WORKING CONDITIONS

Maximum system voltage	1500 V DC
Operating temperature	-40°C~+85°C
Maximum series fuse	15 A
Maximum load (snow/wind)	3600/2400 (with safety factor 1.5)

PACKAGING INFORMATION

Packing Type	40' HQ
Piece/Box	30
Piece/Container	840

DIMENSION OF THE PV MODULE (mm)

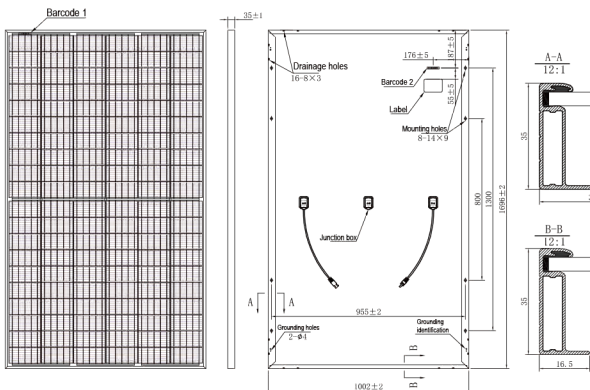

I-V CURVES OF THE PV MODULE

